M3 POS

Quick Manual Ver.1.3

M3 MOBILE

Your Best Mobile Business Partner

PACKAGE

▪ Please check all items below are included in package box.

< M3 POS >



< Cradle >



< Battery >



< Adaptor >



< USB cable >



< Stylus pen >



< DC to 24 pin Gender >

※Warning

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

DEVICE

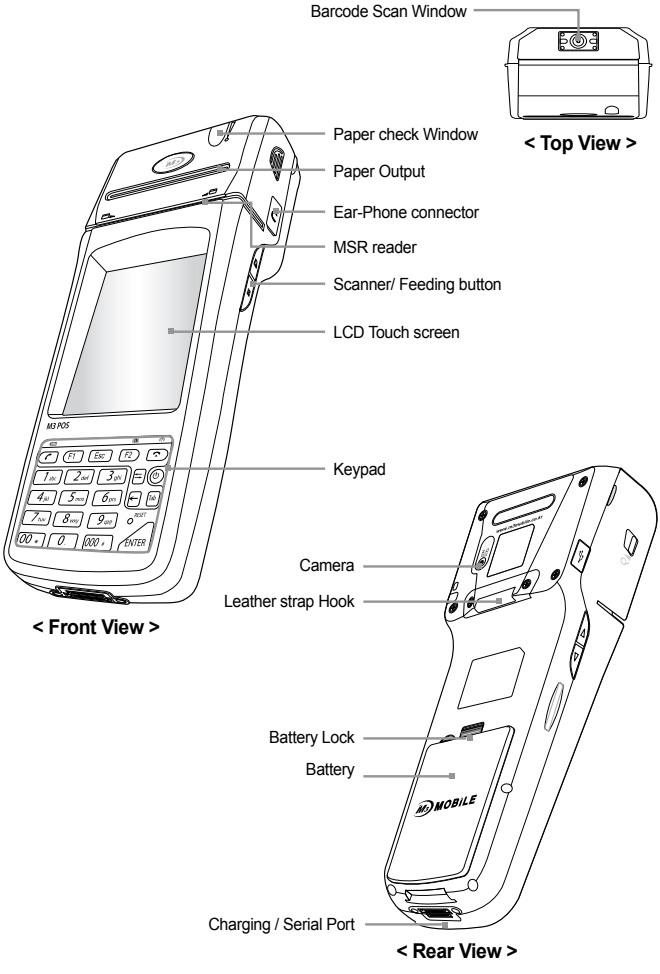
Barcode Scan Window
< Top View >
Paper check Window
Paper Output
Ear-Phone connector
MSR reader
Scanner/ Feeding button
LCD Touch screen
Keypad
< Front View >
Camera
Leather strap Hook
Battery Lock
Battery
Charging / Serial Port
< Rear View >

KEYPAD

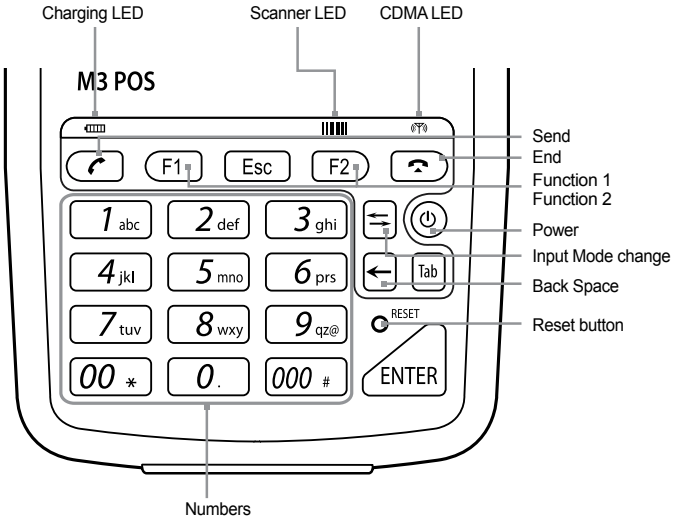
Charging LED
Scanner LED
CDMA LED
M3 POS
F1
Esc
F2
1 abc
2 def
3 ghi
4 jkl
5 mno
6 prs
7 tuv
8 wxy
9 qz@
00 *
0 .
000 #
Tab
RESET
ENTER
Send
End
Function 1
Function 2
Power
Input Mode change
Back Space
Reset button
Numbers

SOFT RESET

When an unexpected error occurs while using the device, SOFT RESET allows your device to restart, similar to rebooting a computer. It will adjust memory allocation - all records and entries are retained after soft reset but unsaved data or files may be lost.

▪ Press the RESET BUTTON briefly.

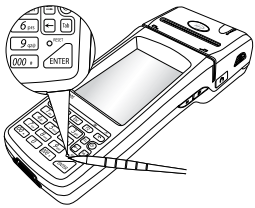

HARD RESET

When an unexpected error cannot be solved with SOFT RESET, perform HARD RESET to restart the system.
It will erase all data stored in the device except in Flash Disk and return to its default settings.

▪ Press the RESET BUTTON more than 5 seconds.

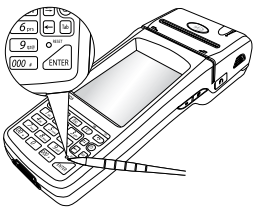

INSTALLATION

SD Card Installation

- Insert the SD Card to the SD card slot which is located at the left side of the device.
- Check whether it is installed properly.

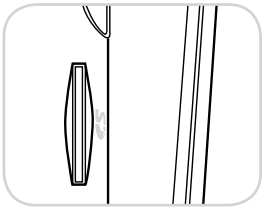

Paper Installation

- Push down the Printer Cover Switch to open Paper Output Cover.
- Insert rolled paper in Paper Slot properly and close the Paper Output Cover.

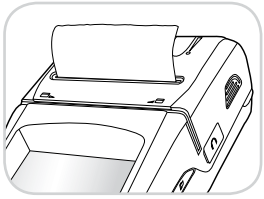

BATTERY

Inserting Battery

- Position the battery to the bottom of battery pack.
- Push down the battery and it clicks when the battery is in right position.

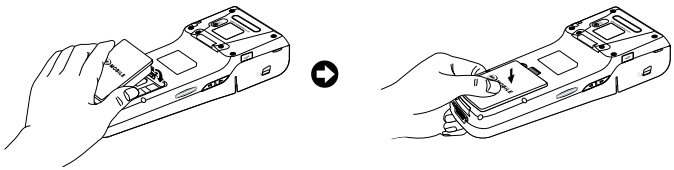

Removing Battery

- Slide up the battery lock to unlock the battery pack.
- Then remove the battery from the battery position using small hole located at the upper left side of the battery pack.

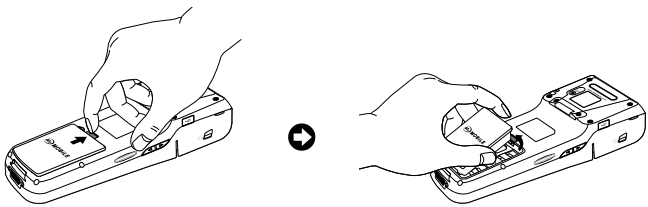

※Warning

Risk of Explosion if Battery is replaced by an Incorrect Type. Dispose of Used Batteries According to the Instructions.

BATTERY

How to charge

- Plug in the AC adaptor plug to wall jack and DC Jack to power connector of cradle.
- Insert the PDA to device slot to start charging the PDA.

Charging status

Charging status of the PDA and the spare battery is indicated by LEDs.

LED charging indicator on the cradle indicates the charging status of the spare battery.

LED on upper left side of the keypad indicates the charging status of the battery attached to the PDA.

Battery attached to the PDA	LED color	Spare battery
The battery is being charged.	RED	The spare battery is being charged.
The battery is fully charged.	GREEN	The spare battery is fully charged.

SCANNER

Scanning

- Launch the Scanner program (either ScanEmul or M3ScanTest).
- Press the SCAN BUTTON toward barcode to read.

Make sure the laser beam covered whole barcode to read data properly.



O

X

Imaging

- Launch the Scanner program.
- Press the SCAN BUTTON toward barcode to read.

Make sure the laser beam covered whole barcode to read data properly.

O

X

※Warning
LASER LIGHT - Do not stare into beam, CLASS 2 LASER PRODUCT
1.0mW, MAX OUTPUT:650nM

CAMERA

- Run the Camera program.
- Tab the Capture button to take a picture.
- Taken pictures are stored in Photo folder.
  (My Device\Flash Disk\Camera\Photo)

* Video function is not supported in M3 POS.

※Warning
It may cause significant damage to your eyes if you directly look the flash attached at camera module.

MSR READER

- Run the M3PosPrinterDemo program.
- Tab the 'Open' and 'Read' in MSR section to read the MSR.
- Make sure the card to read upside-down to let the magnetic part go through the MSR reader.
- Slide card left to right.
- Result can be read at 'Result Window'.

IC CARD READER

- Run the M3PosICCardDemo program.
- Tab the 'Open' to open port and read the IC Card.
- Insert card to IC Card Reader located at the right side of the device.
- Result can be read at 'Result Window'.

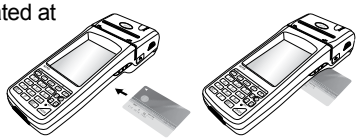

RFID READER

- Run the M3PosRfidDemo program.
- Tab the 'Open' to open port and read the RFID.
- Approach card to around LCD panel of the device.
- Result can be read at 'Result Window'.

* RFID may not work depending on the device options.

SYNCHRONIZE with YOUR PC

Please download the ActiveSync from Microsoft webpage to activesync with PC.

ActiveSync :
http://www.microsoft.com/downloads/en/details.aspx?FamilyID=9e641c34-6f7f-404d-a04b-dc09f8141141

Windows Mobile Device Center (Windows Vista and 7) :
http://www.microsoft.com/windowsphone/en-us/howto/wp6/sync/installing-wmdc.aspx

Should you require any services or technical support on M3 Mobile's products, contact your supplier or visit M3 Mobile technical support webpage http://support.m3mobile.co.kr. Desired or relevant manuals can be downloaded from Manuals or FAQ in technical support webpage. User manual, especially, is included in Flash Disk so that M3 POS users can obtain it from the Flash Disk as well.

For DOA or RMA, please send the defective product to suitable address AFTER consulting the supplier.

MEMO

Headquarter/Service Center

M3 bldg., 735-45,
Yeoksam-Dong, Gangnam-gu,
Seoul, 135-080, Korea
Tel : +82 2 574 0037
Fax : +82 2 558 1253
www.m3mobile.co.kr
sales@m3mobile.co.kr

Production Center

Chun-ui Techno Park 201-610,
202, Chun-ui Dong, Won-Mi gu,
Buchoen, Gyeonggi Do,
420-857, Korea
Tel: +82 32 623 0030
Fax: +82 32 623 0035

Copyright©2000 - 2011 M3 Mobile Co., Ltd. All Rights Reserved.